

Confined Space Equipment

Lone Worker Safety Solutions



TPASS®3 Pass Device
Two-way
Radio Signaling



"Lack-of-Motion" alarms



TPASS 3
Pass Device

#ТРЗ-Н-R-Н \$**875**.00

When ordering specify:

- Auto or Manual motion and temp. sensing
- Select 30, 60, 90, or 120 seconds of Motion Timing (not field adjustable)
- Select wall charger or 12v Vehicle Charger

Portable work site alarm box monitors "Panic/Distress" and "Lack-of-Motion" signals from workers wearing TPASS 3 Pass Device.

Remotely resets with SuperCELL SC500.

16.5 in. wide x 8.75 in. deep x 16.5 in. high, weighs 12 lbs.



#G-PWSA-H-1

\$2,999.00



SuperCELL® SC500 Monitor

#SC500-H-LW \$**775**.00 Two-way emergency signaling safety monitor

"Man-down" alarm

"Lack-of-Motion" alarm

Alarm monitoring of other SuperCELL or TPASS3 signals

2.19 in. wide x 1.38 in. deep x 4 in. high weighs 0.3 lbs.

When ordering please:

- Select 60, 90, or 120 seconds of Motion Timing (not field adjustable)
- Select wall charger or 12v Vehicle Charger

2.12 in. wide x 2.25 in. deep x 4.12 in. high, weighs $0.5 \, \text{lbs}$.

800-225-3553 www.safetysourcenortheast.com

Work Site Alarm Systems


Audible and motion sensing man-down PASS Alarms and wireless radio telemetry TPASS alarms provide safety monitoring, evacuation, and location of workers MS1000-H-X is an AC powered Micro Receiver System designed to send and receive signaling data Transmissions from Grace telemetry products.

6 in. wide x 6.5 in. deep x 15 in. high, weighs 10 lbs.

MS1000-H-X also available in DC configuration







Micro TPASS® Repeater two-way signal repeating device receives and retransmits radio signals between TPASS 3, SuperCELL SC500, and Alarm Box

Safety Source Northeast

P.O. Box 532 Sturbridge, MA 01566-0532 Shipping: 29 Gillespie Road Charlton, MA 01507

Toll Free 800-225-3553 Tel. 508-248-4265 Fax 508-248-4266










2.12 in. wide x 2.25 in. deep x 4.12 in. high, weighs 0.5 lbs.

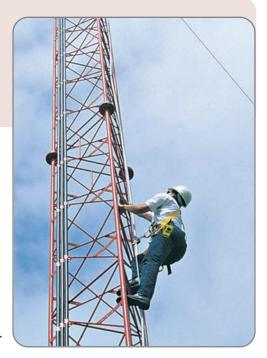

800-225-3553 www.safetysourcenortheast.com